



| | | TCBMA-63 |
|------|-----------|---|
| | | IEC60947-2 GB/T14048.2 |
| | | CQC |
| | | 1P 2P 3P 4P |
| (Hz) | | 50/60 |
| (A) | I_{nm} | 63 |
| (A) | I_n | 1 2 3 4 5 6 10 16 20 25 32 40 50 63 |
| (V) | U_e | AC230/400 1P AC230 2P AC400 2P 3P 4P |
| (V) | U_i | 690 |
| (kV) | U_{imp} | 6 |
| (kA) | I_{cs} | 6 |
| (kA) | I_{cu} | 6 |
| | | C(8I \pm 20%) D(12I \pm 20%) |
| | | 3 |
| | | MK CF SD MK+CF + M MN M+MN MMS |
| | | 10000 |
| | | 20000 |
| | | IP20 |

TENGEN

| | |
|--|-------------------|
| | TQEMA- 63 |
| | -35 +70 |
| | 2000m |
| | 16mm ² |
| | 2.5N m |
| | II III |
| | THB5- 7.5(1.0) |
| | |

| | | | | | |
|---|--------|--|--------|--|--|
| | | | | | |
| C | 6.4In | | t 0.2s | | |
| | 9.6In | | t 0.2s | | |
| D | 9.6In | | t 0.2s | | |
| | 14.4In | | t 0.2s | | |

" " +30

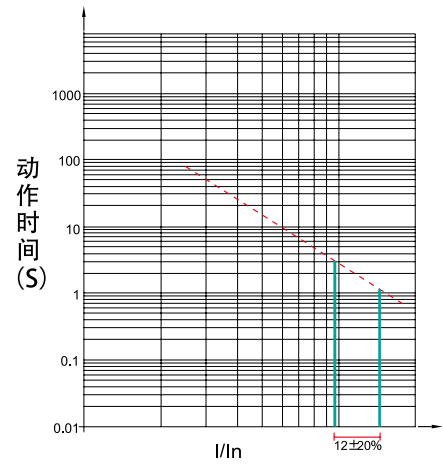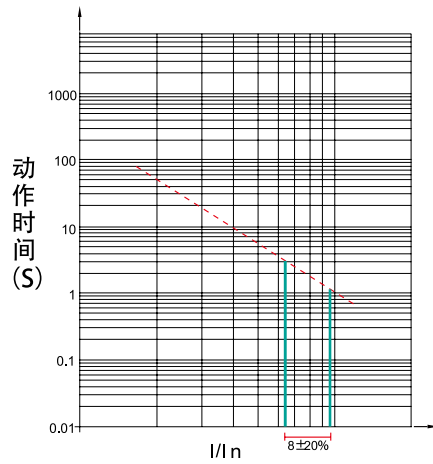

| A | mm ² |
|-------|-----------------|
| 1 6 | 1 |
| 10 | 1.5 |
| 16 20 | 2.5 |
| 25 | 4 |
| 32 | 6 |
| 40 50 | 10 |
| 63 | 16 |

