

# TGB1NLA- 125 H

1

TGB1NLA125 H  
400V 63A 125A

2

3



# TGB1NLA-125 H

1

	TGB1NLA-125	TGB1NLA-125H
	-35 +70	-35 +70
	2000m	2000m
(mm <sup>2</sup> )	50	50
(N <sub>m</sub> )	3.5	3.5
	III	III
	TH85-7.5	TH85-7.5

3.2


2

2

		A					
				I <sub>n</sub> 63A	I <sub>m</sub> >63A		
a	C D	1.05I <sub>n</sub>	1.05I <sub>n</sub>	t 1h	t 2h		5s
		1.3I <sub>n</sub>		t 1h	t 2h		
c	C	8I <sub>n</sub> 1-20%		t 0.2s			
		8I <sub>n</sub> 1+20%		t 0.2s			
d	D	12I <sub>n</sub> 1-20%		t 0.2s			
		12I <sub>n</sub> 1+20%		t 0.2s			

30

3.3

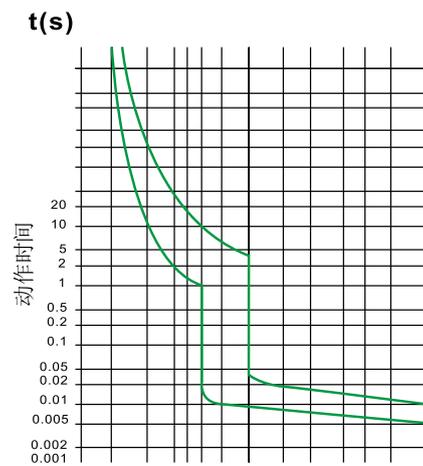

C

D

# TGB1NLA- 125 H

3.4                      50mm<sup>2</sup>                      3                      3.5N· m

3

A	mm <sup>2</sup>
63	16
80	25
100	35
125	50

## 4

FINAL-END PRODUCT SELECTION

## 5

- 5.1                      TGB1NLA- 125
- 5.2                      C
- 5.3                      2P
- 5.4                      100A
- 5.5                      30mA
- 5.6                      50
- 5.7                      TGB1NLA- 125 2P C100 30mA 50